



JIS F7309 JIS F7377

Design / Dizayn: JIS F7309 STOP
JIS F7377 SDNR



Pressure Rate / Basınç Aralığı: 16 K

Size Range / Ölçü Aralığı: DN50-DN200

Flange Ends / Flanş: JIS B2239 - 16 K

Inspection / Teftiş: JIS F7400

Application : Aboard ships for hot and cold
Water, Oil and Steam.

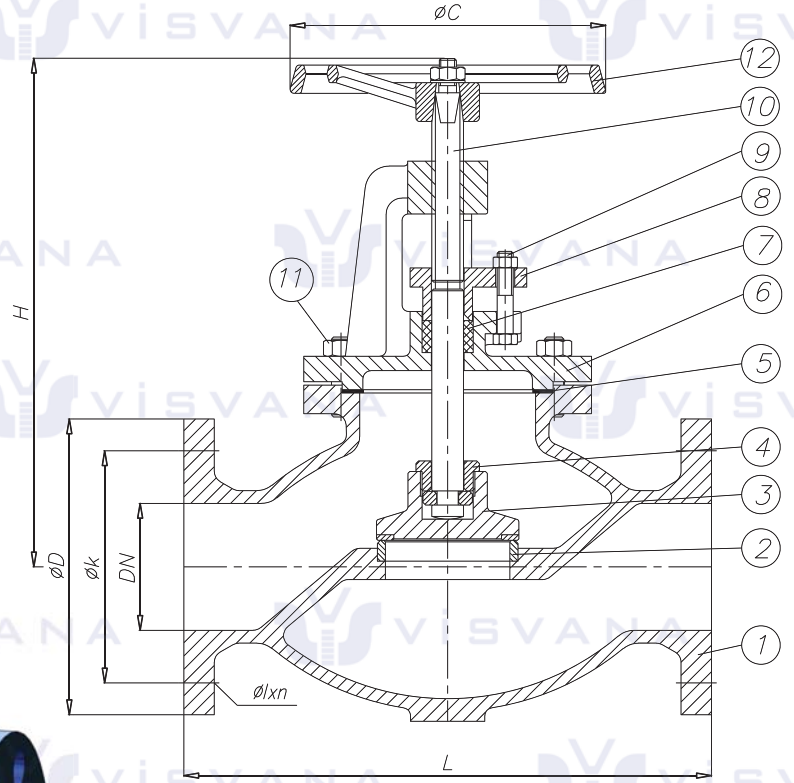

Screw Down Non Return
(SDNR)

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG 40 / GS-C25	8	Gland	Baskı	GG 25 / GGG 40 / GS-C25
2	Seat	Burç	Bronze Rg5 / 13Cr / SS 304	9	Bolt/Nut	Cıvata/Somun	Galvanized Steel
3	Disc	Klapa	GG 25 / GGG 40 / GS-C25	10	Stem	Mil	CuZn35Ni / 13Cr / SS 304
4	Disc Nut	Baskı	Brass / 13Cr	11	Stud/Nut	Cıvata/Somun	Galvanized Steel
5	Gasket	Conta	Klingerite	12	Handwheel	Volan	GG 25
6	Bonnet	Kapak	GG 25 / GGG 40 / GS-C25				
7	Packing	Salmastra	Graphite				

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
50	220	260	160	155	120	Ø19x8	12.1	750261	751151
65	270	300	180	175	140	Ø19x8	17.9	750262	751152
80	300	315	200	200	160	Ø23x8	25.7	750263	751153
100	350	340	220	225	185	Ø23x8	33.9	750264	751154
125	430	400	250	270	225	Ø25x8	54.0	750265	751155
150	500	460	300	305	260	Ø25x12		750266	751156
200	570	550	400	350	305	Ø25x12		750267	-