


QUICK CLOSING VALVE STRAIGHT FORM VDAK-16

ANİ KAPAMA VANASI DÜZ TİP VDAK-16

VDAK-16

vis

Pressure Rate / Basınç Aralığı: PN 16
Size Range / Ölçü Aralığı: DN15-DN200
Dimensions / Ölçüler: DIN 3202/2-F1(Straight-Düz)
Flange Ends / Flanş: DN 2533
Options / Opsiyon: ANSI, JIS Flanges

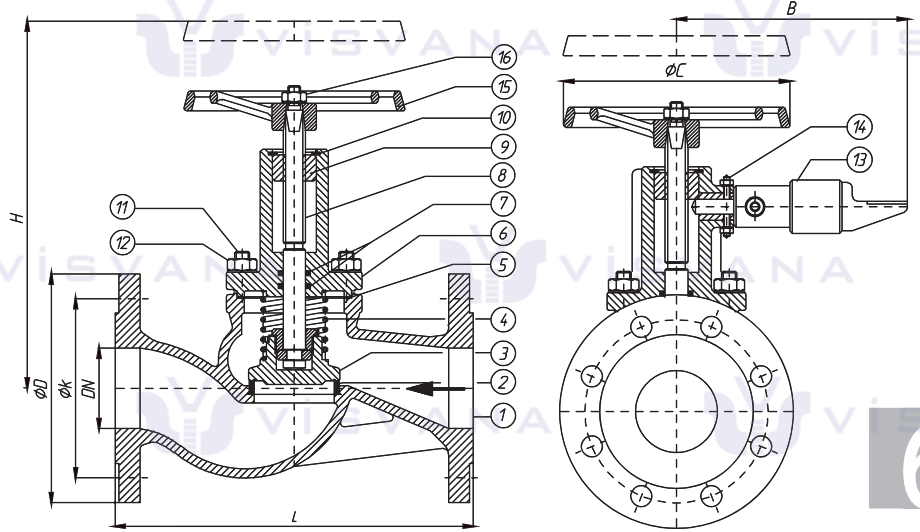

NO	P. NAME	P. ADI	MATERIAL / MALZEME	NO	P. NAME	P. ADI	MATERIAL / MALZEME
1	Body	Gövde	GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470	8	Spindle	Mil	AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex
2	Seat Ring	Gövde Siti	AISI 304 / AISI 316 / Bronze RG5 / Duplex	9	Stem Nut	Mil Somunu	AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex
3	Disc	Disk	AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex	10	Segment	Segman	Steel
4	Spring	Yay	AISI 302	11	Stud	Saplama	Steel / A2 / A4
5	Gasket	Conta	Klingerite / Graphite	12	Nut	Somun	Steel / A2 / A4
6	Bonnet	Kapak	GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470	13	Piston	Piston	Brass
7	O-Ring	O-Ring	Viton	14	Stud Nut	Saplama	Steel / A2 / A4
				15	Handwheel	Volan	GG25
				16	Nut	Somun	Steel / A2 / A4

<i>Nominal Pressure / Basıncı</i>	PN	16											10	
<i>Nominal Diameter / Anma Çapı</i>	DN	15	20	25	32	40	50	65	80	100	125	150	200	
<i>Valve Dimensions / Vana Boyutları</i> TSEK DIN 3202/2-F1	L	130	150	160	180	200	230	290	310	350	400	480	600	
	B	145										150		155
	ØC	120		140		160		180	200	225	250	300	400	
	H ^{Open} Açık	185	185	195	205	230	240	275	290	350	410	430	580	
<i>Flange Dimensions / Flanş Ölçüleri</i> TS810/DIN2501 PN 16	D	95	105	115	140	150	165	185	200	220	250	285	340	
	k	65	75	85	100	110	125	145	160	180	210	240	295	
<i>Weight / Ağırlık</i>	kg	4,4	5,5	6,5	7,5	10,5	13,5	17,5	24	33	55	95	130	

6