

Design / Dizayn: API 609

Face to Face / L Boyu: API 609


P. Rate / B. Aralığı: PN 20 (150Lb)

Size Range / Ölçü Aralığı: DN 50 (2") - DN 600 (24")

Temperature / Sıcaklık: -20°C+420°C

Connection Ends / Bağlantı: Wafer, Lug, Flanged

Test: API 598

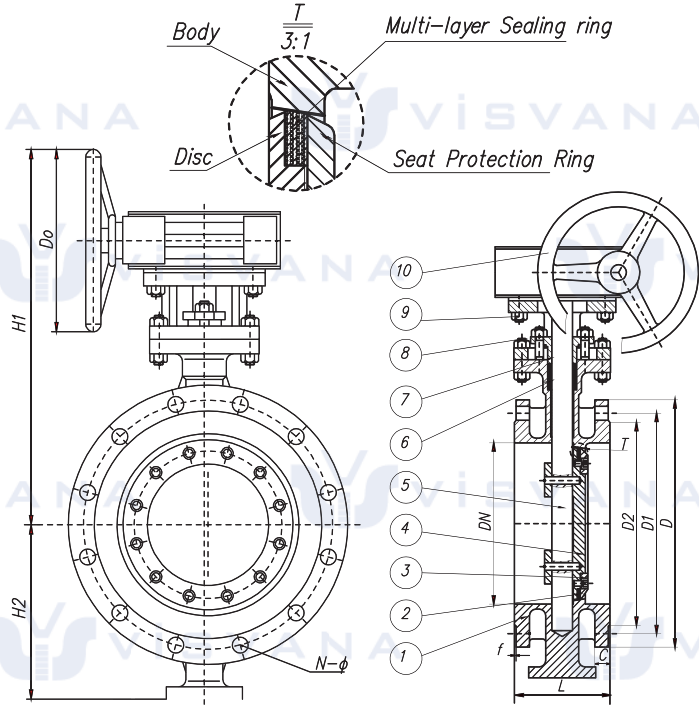

TESTING STANDART		PRODUCTION STANDART	
Design Pressure	150 LB	Design & Manufacture	API 609
Shell Test	3,1	Flange Connection	ANSI B16.5
Seall Test	2,2	Face To Face	ANSI B16.10
Suitable Temp.	-99°C / 500°C	Testing & Inspection	API 598
Suitable Medium	Oil / Gas / Water	Fire Safe	

NO	PART NAME	PARÇAADI	MATERIAL / MALZEME	NO	PART NAME	PARÇAADI	MATERIAL / MALZEME
1	Body	Gövde	ASTM A216 WCB	6	Packing	Salmastra	Graphite
2	Multi-Layer S. Ring		SS304 + Graphite	7	Flange Gland		ASTM A216 WCB
3	Seat Protection Ring		ASTM SS 316	8	Bolt	Civata	ASTM A 193 B7
4	Disc	Klape	ASTM SS 316	9	Nut	Somun	ASTM A 194 2H
5	Stem	Mil	ASTM A 182 F6	10	Worm Gear		

DIMENSIONS (mm) ÖLÇÜLER (mm)		in	L	D	D1	D2	N-Ø	C	F	H1	H2	DO
150 Lb	2"		108	152	120,7	92	4-19	16,0		290	110	145
	3"		114	191	139,7	127		19,5		315	130	
	4"		127	229	152,4	157	8-19	24,0		360	170	
	5"		140	254	190,5	186		24,0		470	185	290
	6"		140	279	216,0	216	8-22	25,5		505	210	
	8"		152	343	241,3	270		29,0		570	240	
	10"		165	406	298,5	324		30,5	1,6	610	285	340
	12"		178	483	362,0	381	12-25	32,0		690	310	
	14"		190	533	431,8	413	12-28	35,0		730	350	
	16"		216	597	476,3	470	16-28	37,0		770	375	380
	18"		222	635	539,8	533	16-32	40,0		835	405	
	20"		229	699	635,0	584	20-32	43,0		925	455	
	24"		267	813	749,3	692	20-35	48,0		940	510	