

UNDER GROUND HYDRANT (SHORT TYPE) YER ALTI YANGIN HİDRANTI


VKYV-10-16



Pressure Rate / Basınç Aralığı: PN10-PN16

Size Range / Ölçü Aralığı: DN80

Flange Ends / Flanş: DIN 3221 / TS 2821/2

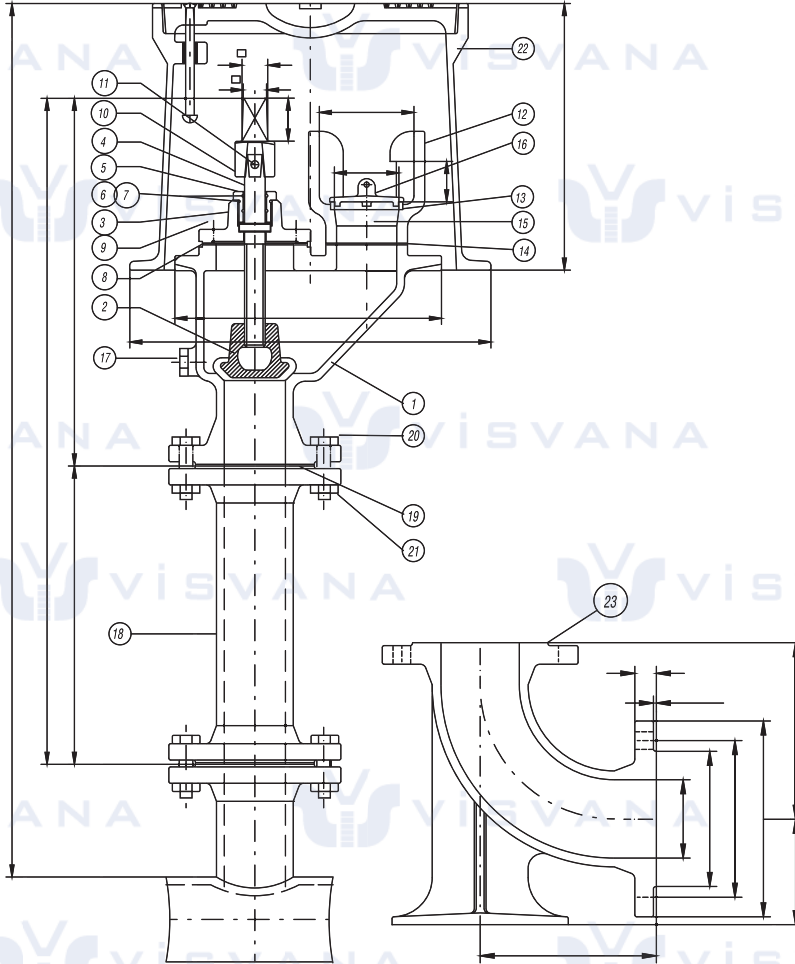

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40-50	13	Outlet Seat	Kurt Ağzı Burcu	Ms 58 / AISI 304
2	Valve Cone	Kapama Elemanı	GG 25 / GGG-40-50	14	Gasket	Conta	EPDM
3	Cover	Kapak	GG 25 / GGG-40-50	15	Bolt	Civata	5 D / SS
4	Stem	Mil	AISI 304 / Ms-58	16	Outlet Cover	Kapak	GG 25
5	O-Ring Nut	O-Ring Somunu	AISI 304 / Ms-58	17	Drainage Plug	Tahliye Tapası	Ms 58 / Bronze
6	O-Ring	O-Ring	EPDM	18	Lower Pipe	Alt Gövde	GG 25 / GGG-40/50
7	O-Ring	O-Ring	EPDM	19	Gasket	Conta	EPDM
8	Gasket	Conta	EPDM	20	Bolt	Civata	5 D / SS
9	Bolt	Civata	5 D/SS	21	Nut	Somon	5D / Paslanmaz Çelik
10	Shaft Cap	Mil Başlığı	GG 25	22	Surface Box	Buşakle Kovası	GG 25
11	Cotter Pin	Kopilya	St 37 / AISI 304	23	90° Elbow	90° Dirsek	GG 25 / GGG-40/50
12	Outlet	Kurt Ağzı	GG 25 / GGG-40-50				

9

Fire & Irrigation
Hydrants