


Pressure Rate / Basınç Aralığı : Max. PN16

Size Range / Ölçü Aralığı: DN50 - DN600

Face to Face / L Boyu : EN 558 Serie 20,
DIN 3202-K1

Tests / Testler : EN 12266

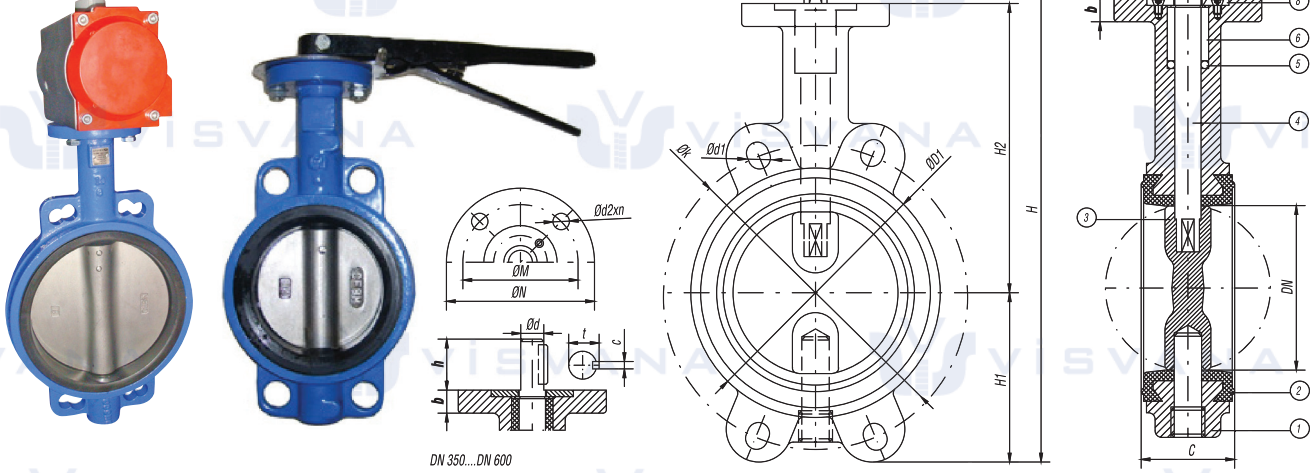

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25/GGG 40/50 / GS-C 25 / AISI 304	6	Gland Bush	Baskı Burcu	PVC / PTFE
2	Gasket	Conta	EPDM / BUNA-N	7	Retaining Ring	Segman	St
3	Disc	Klape	GGG 40 / AISI 304 / AISI 316 /Bronze	8	Washer	Rondela	St-37
4	Stem	Mil	AISI 420 / AISI 316	9	Bolt	Civata	50 / S.S
5	O-Ring	O-Ring	EPDM / BUNA-N				

Nominal Diameter / Anma Çapı		DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
			2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
Valve Dimensions / Vana Boyutları TS 11341 DIN 3337/K1 ISO 5752/20-5		C	43	46		52	56		60	68	78		102	114	127	154	
		H1	67	74	96	110	122	136	160	201	237	267	302	325	362	422	
		H2	140	152	159	177	190	203	241	273	311	350	375	400	450	510	
		H Kollu Redüktörlü	237	254	283	315	340	367	439	512	600						
			275	294	323	355	380	407	480	553	630	784	844	892	1008	1128	
		ØD1	94	112	126	152	185	210	262	316	372						
Top Flange Dimensions / Üst Flanş Boyutları DIN3337 ISO 5211/1		ØN	90						152			175			210		
		ØM	70						125			140			165		
		Ød2xn	Ø10x4						Ø14x4			Ø19x4			Ø23x8		
		b	12						15,5			20		23	25		
Stem Dimensions / Mil Boyutları DIN 3337 ISO 5211/1		Ød	Ø14			Ø16			20	22	28	42	48	52	58	68	
		a	12			14			17	19	25						
		h	31						38					105	130		
		t											45	51,5	56	62	72,5
		c											12	14	16	18	20
Flange Dimensions / Flanş Boyutları TS 810 DIN 2501		PN 6	Øk	110	130	150	170	200	225	280	335	395					
			Ød1xn.	Ø14x4			Ø18x4				22x4						
		PN 10	Øk	125	145	160	180	210	240	295	350	400	460	515	565	620	725
			Ød1xn	Ø18x4						23x4			Ø27x4			30x4	
		PN 16	Øk	125	145	160	180	210	240	295	355	410	470	525	585	650	770
Ød1xn	Ø18x4						Ø23x4			Ø27x4			Ø30x4		33x4	36x4	
Weight / Ağırlık (~ for iron)		kg	3,5	4,0	4,4	6,0	7,3	8,5	15,8	22,4	32,9	54	76	93	133	198	