


Design / Dizayn : TS 11494
Pressure Rate / Basınç Aralığı : PN 6 -10 -16
Size Range / Ölçü Aralığı: DN15 - DN600
Face to Face / L Boyu : EN 558 Serie 1,
DIN 3202 F1
Flange Ends / Flanş : EN 1092-2/B
Tests / Testler : EN 12266

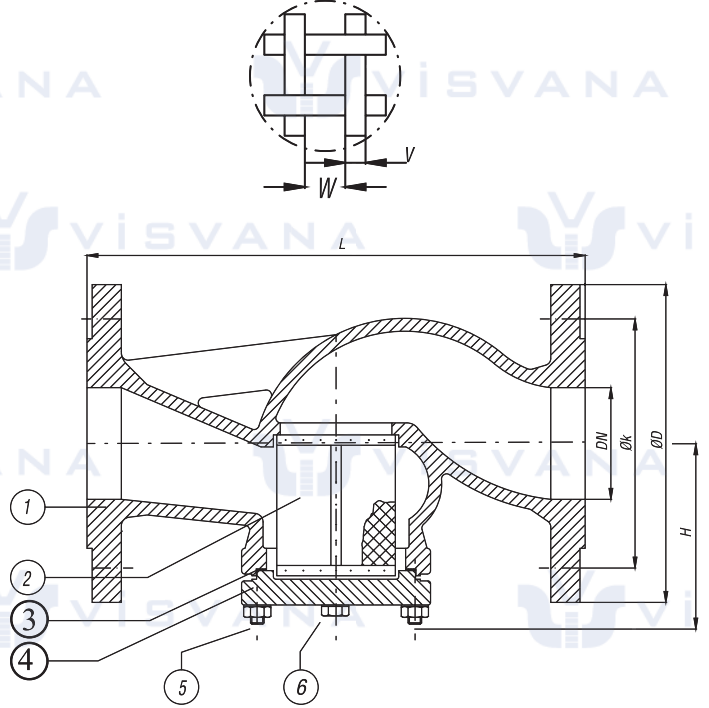

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25/GGG-40/50
2	Filter	Filtre	AISI 304
3	Gasket	Conta	Klingerit/Franzelit
4	Bonnet	Kapak	GG 25/GGG-40/50
5	Bolt	Civata	5.6 / A2, A4
6	Plug	Tapa	GG 25/Ms 58/SS

Nominal Pressure / Anma Basıncı	PN	6-10-16														
Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	
Valve Dimensions / Vana Boyutları TS 11494 DIN3202/2-F1	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	
	H(min)	75	75	85	90	95	100	135	145	170	205	225	270	290	360	
	H(max)	115	125	150	160	170	185	250	280	330	385	400	500	580	700	
Mesh / Filtre Özellikleri	Ba	52	62	72	77	97	112	168	188	218	243	281	317	485	520	
	S	25	25	29	38	50	60	65	85	105	130	160	210	260	310	
	v	0,35				0,40				0,50						
	W	0,65				0,85				0,93						
Plug Dimensions / Tapa Ölçüleri	D1								R7/8"							R1"
Flange Dimensions / Flanş Ölçüleri TS 810 / DIN 2501 PN 6	D	80	90	100	120	130	140	160	190	210	240	265	320	375	400	
	k	55	65	75	90	100	110	130	150	170	210	225	280	335	395	
Flange Dimensions / Flanş Ölçüleri TS 810 / DIN 2501 PN 10	D	95	105	115	140	150	165	185	200	220	250	285	340	395	445	
	k	65	75	85	100	110	125	145	160	180	210	240	295	350	400	
Flange Dimensions / Flanş Ölçüleri TS 810 / DIN 2501 PN 16	D	95	105	115	140	150	165	185	200	220	250	285	340	405	460	
	k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	
Weight / Ağırlık (~ for iron)	kg	1,97	2,98	3,7	5,6	7,6	9,8	15,7	24,9	34	43	54	118	177	275	

Not: DN600'a kadar üretimimiz vardır.
Note: We have production till DN600.