


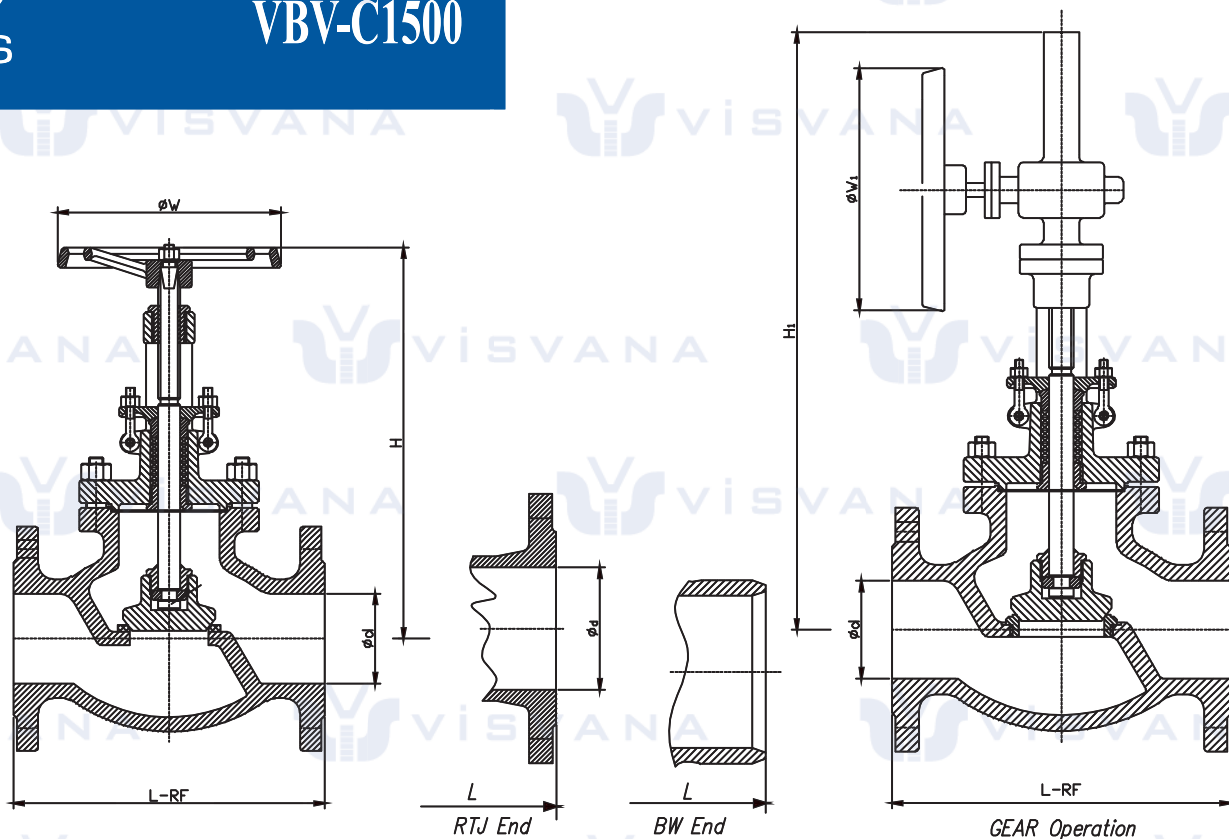

Class 600 & Class 1500 Globe Valve

Class	Size		Dimensions (mm)								Weight (Kg)	
	NPS	DN	L			d	H	H1	W	W1	H.W	G.O
			RF	RTJ	BW							
600	2	50	292	295	292	51	360		250		35	
	2 1/2	65	330	333	330	64	410		280		42	
	3	80	356	359	356	76	465		280		66	
	4	100	432	435	432	102	545	575	400	310	117	148
	5	125	508	511	508	127	625	660	500	310	243	208
	6	150	559	562	559	152	785	975	550	460	263	334
	8	200	660	664	660	200	930	1120	650	460	469	544
	10	250	787	791	787	248		1219		600		875
	12	300	838	841	838	298		1570		600		1280
900	2	50	368	371	368	48	480		350		55	
	2 1/2	65	419	422	419	57	520		350		68	
	3	80	381	384	381	73	564	630	400	310	113	128
	4	100	457	460	457	98	685	720	450	310	179	210
	5	125	559	562	559	127	780	840	550	460	270	325
	6	150	610	613	610	146	950	1015	650	460	429	480
	8	200	737	740	737	190	1050		700		815	
1500	2	50	368	371	368	48	505		350		137	
	2 1/2	65	419	422	419	57	550		400		141	
	3	80	470	473	470	70	630	765	450	310	261	320
	4	100	546	549	546	92	808	890	460	310	336	397
	6	150	705	711	705	137	930	1020	610	530	966	1035
	8	200	832	841	832	178	1140	1230	610	530	1210	1280

Noted: We may provide other different actuators according to the customer's request, such as pneumatic, electric, hydraulic actuators, the details of them according to the actual valve working condition.