


BRONZE PRESSURE REDUCING VALVE

BRONZ BASINÇ DÜŞÜRÜCÜ VALF


VPRV-20



Pressure Rate / Basınç Aralığı: 20 Bar
 Size Range / Ölçü Aralığı: DN15-DN100
 Ends / Bağlantı: BSPT
 Temperature / Sıcaklık: < 170 °C
 Application / Uygulama: Water and Gas.
 Out Pressure DN15...25 : 1~4 bar
 Out Pressure DN32...100 : 1~5bar

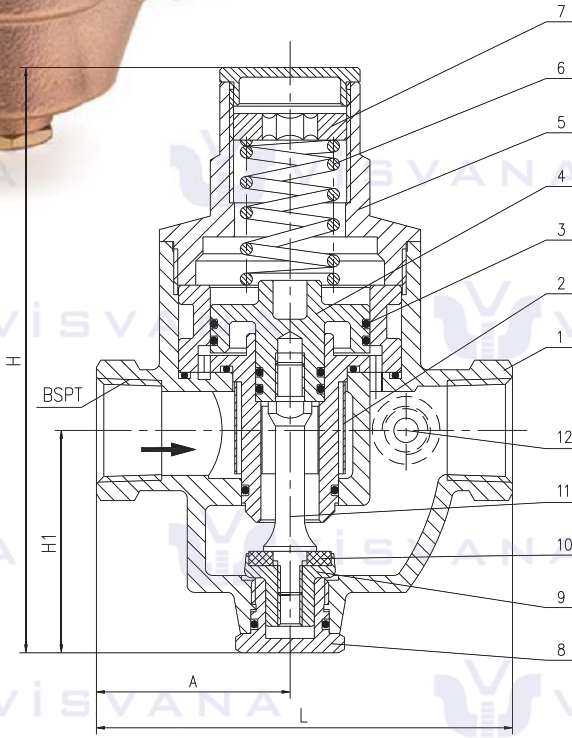

DN 15...25

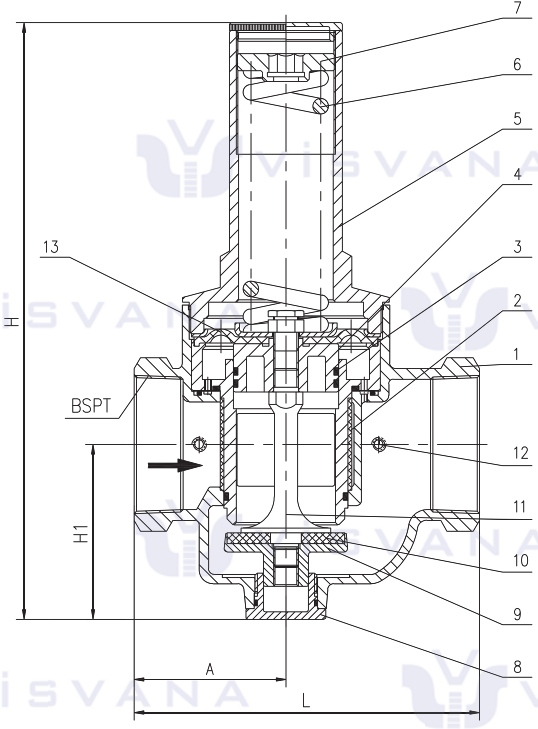

DN 32...100

BSP

NO	PART NAME	PARÇAADI	MATERIAL / MALZEME	NO	PART NAME	PARÇAADI	MATERIAL / MALZEME
1	Body	Gövde	Bronze Rg5	8	Cap	Kapak	CuZn39Pb2
2	Mesh	Mesh	SS 304	9	Disc	Klape	CuZn39Pb2
3	O-ring	O-ring	NBR	10	Gasket	Conta	NBR
4	Core	İç parça	CuZn40Pb2	11	Stem	Mil	CuZn39Pb2
5	Bonnet	Kapak	Bronze Rg5	12	Connection Plug	Bağlantı Tapa	CuZn39Pb2
6	Spring	Yay	Silicon Manganese Steel	13	Diaphragm	Diyafram	NBR+Polytene
7	Stem Gasket	Ayar somunu	CuZn39Pb2				

Dimensions / Ölçüler

DN	L	A	H	H1	Rc
15	89	41.5	121	46	1/2"
20	92	43	121	46	3/4"
25	98	46	121	46	1"
32	126	55.	192	62	1-1/4"
40	126	55.5	192	62	1-1/2"

Dimensions / Ölçüler

DN	L	L1	H	H1	Rc
50	168	72	272	85	2"
65	174	75.5	272	85	2-1/2"
80	225	98.5	385	113	3"
100	230	104.5	385	113	4"