

ANGLE TYPE MUD BOX

KÖŞE TİP ÇAMUR KUTUSU

VCVA-10



Pressure Rate / Basınç Aralığı: PN 4

Size Range / Ölçü Aralığı: DN40-DN400


Flange Ends / Flanş: DIN EN 1092(PN10Flange)

Application: For pipelines for sea cooling water

Dimensions / Ölçüler: DIN 87 151-E Angle

DIN 87 151-D Straight

Test: DIN EN 12266

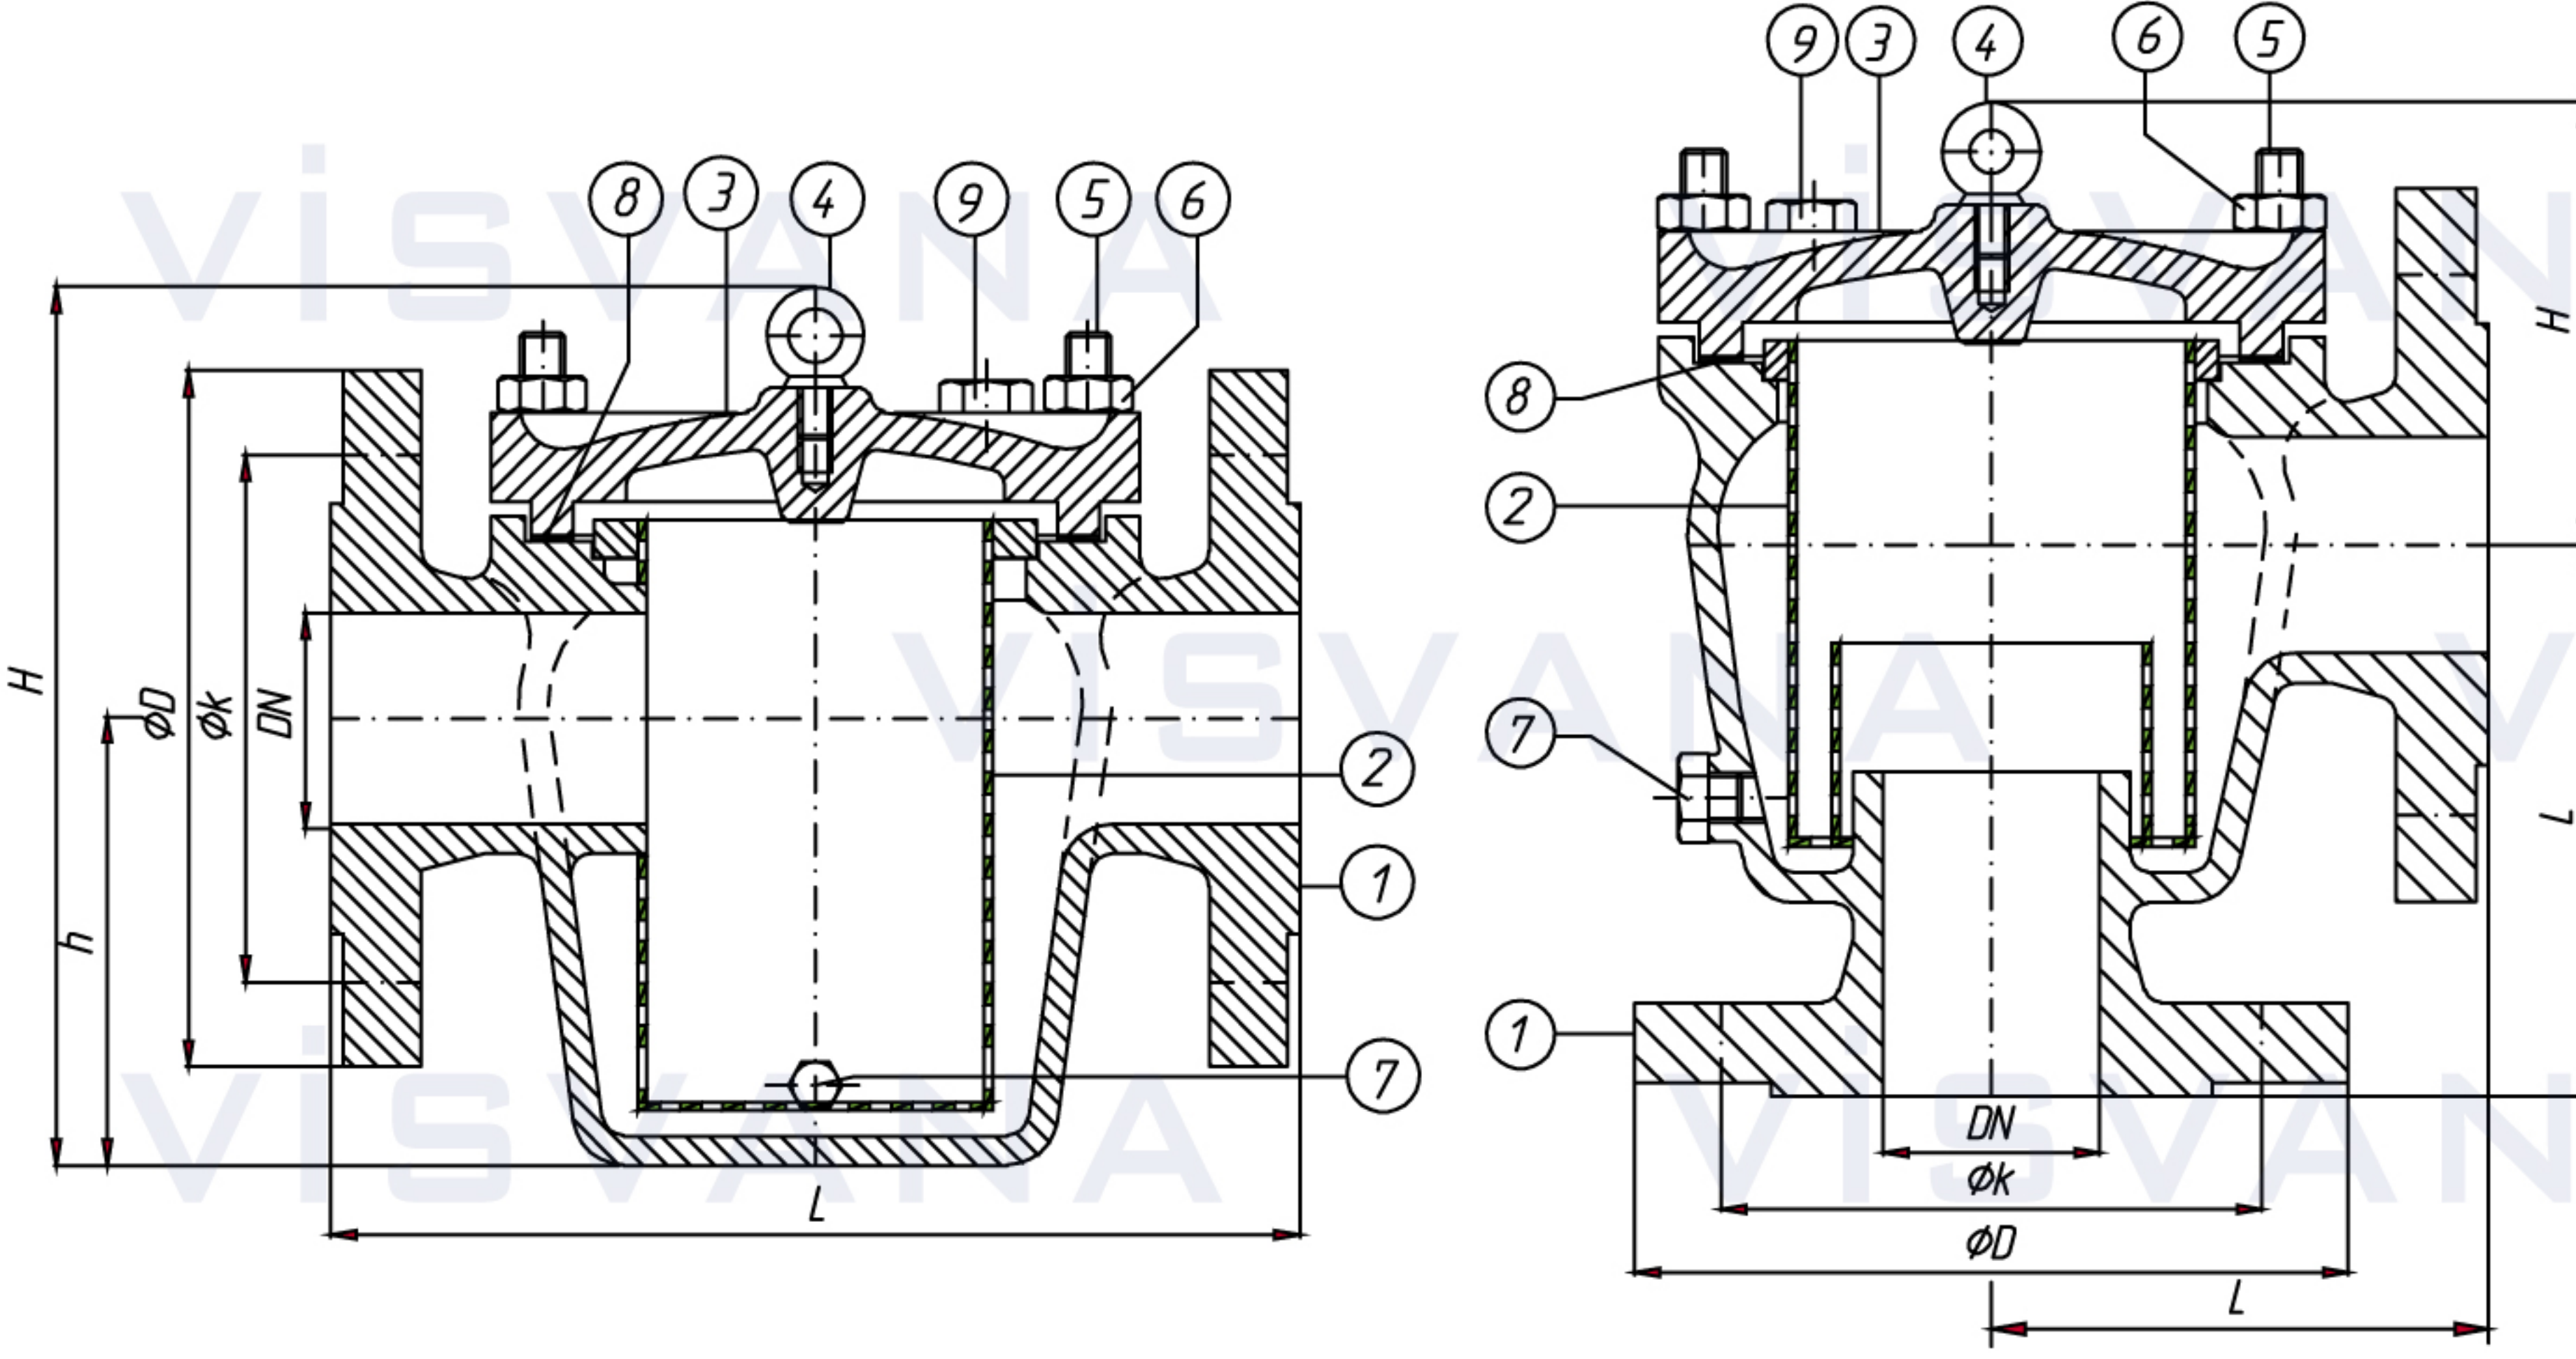

4

| NO | PART NAME | PARÇA ADI | MATERIAL / MALZEME |
|----|---------------|--------------|---|
| 1 | Body | Gövde | GG25/GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470 |
| 2 | Screen | Filtre | AISI 304L / AISI 316L / AISI 316Ti / CuNi10Fe |
| 3 | Bonnet | Kapak | GG25/GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470 |
| 4 | Ring Screw | Mapa | Galvanized Steel |
| 5 | Ring Stud | Saplama | Steel / A2 / A4 |
| 6 | Nut | Somun | Steel / A2 / A4 |
| 7 | Plug | Tapa | Bronze / AISI 304 / AISI 316 |
| 8 | O-Ring/Gasket | O-Ring/Conta | EPDM / NBR |

| Nom. Diameter Anma Çapı | Capacity Water (v=1,5m/sec.) | |
|----------------------------|---------------------------------|-------------------|
| | l/min. | m ³ /h |
| DN | | |
| 40 | 113 | 6,8 |
| 50 | 177 | 10,6 |
| 65 | 298 | 17,9 |
| 80 | 495 | 29,7 |
| 100 | 708 | 42,4 |
| 125 | 1100 | 66,2 |
| 150 | 1590 | 95,4 |
| 175 | 2360 | 142 |
| 200 | 2830 | 169,6 |
| 250 | 4420 | 235,2 |
| 300 | 6365 | 382 |
| 350 | 8660 | 520 |
| 400 | 12350 | 740 |

| Nom. Diameter Anma Çapı | STRAIGHT FORM / DÜZ TİP | | | | | | | Diameter Ağırlık kg |
|----------------------------|-------------------------|-----|-----|-----|-----|-----|--|---------------------------|
| | DN | ØD | Øk | L | H | h | | |
| 40 | 150 | 110 | 200 | 205 | 95 | 14 | | |
| 50 | 165 | 125 | 230 | 225 | 106 | 19 | | |
| 65 | 185 | 125 | 290 | 260 | 134 | 26 | | |
| 80 | 200 | 160 | 310 | 310 | 156 | 33 | | |
| 100 | 220 | 180 | 350 | 345 | 185 | 45 | | |
| 125 | 250 | 210 | 400 | 395 | 225 | 60 | | |
| 150 | 285 | 240 | 480 | 465 | 265 | 86 | | |
| 175 | 315 | 270 | 550 | 500 | 296 | 115 | | |
| 200 | 340 | 295 | 600 | 565 | 335 | 147 | | |
| 250 | 395 | 350 | 600 | 610 | 345 | 180 | | |
| 300 | 445 | 400 | 700 | 675 | 390 | 245 | | |
| 350 | 505 | 460 | 800 | 790 | 425 | 325 | | |
| 400 | 565 | 515 | 740 | 900 | 470 | 415 | | |

| Nom. Diameter Anma Çapı | ANGLE FORM / AÇILI TİP | | | | | Diameter Ağırlık kg |
|----------------------------|------------------------|-----|--------------------|-----|-----|---------------------------|
| | DN | ØD | Øk | L | H | |
| 40 | 150 | 110 | 125 | 240 | 15 | |
| 50 | 165 | 125 | 135 | 260 | 21 | |
| 65 | 185 | 125 | 150 | 280 | 25 | |
| 80 | 200 | 160 | 175 | 330 | 36 | |
| 100 | 220 | 180 | 195 | 350 | 51 | |
| 125 | 250 | 210 | 220 | 415 | 69 | |
| 150 | 285 | 240 | 270 | 470 | 94 | |
| 175 | 315 | 270 | 300 | 505 | 120 | |
| 200 | 340 | 295 | 300 | 540 | 138 | |
| 250 | 395 | 350 | 390 | 660 | 200 | |
| 300 | 445 | 400 | 450 | 760 | 278 | |
| 350 | 505 | 460 | 400 | 730 | 330 | |
| 400 | 565 | 515 | 420 ₅₂₀ | 980 | 458 | |