

BALL VALVE, FULL BORE TAM GEÇİŞLİ KÜRESEL VANA

VKVP-16



Design / Dizayn : DIN 3357



Pressure Rate / Basınç Aralığı : PN 16

Size Range / Ölçü Aralığı: DN32 - DN200

Face to Face / L Boyu : EN 558 Serie 14,
DIN 3202 F4

Flange Ends / Flanş : EN 1092

Tests / Testler : EN 12266 & API 598

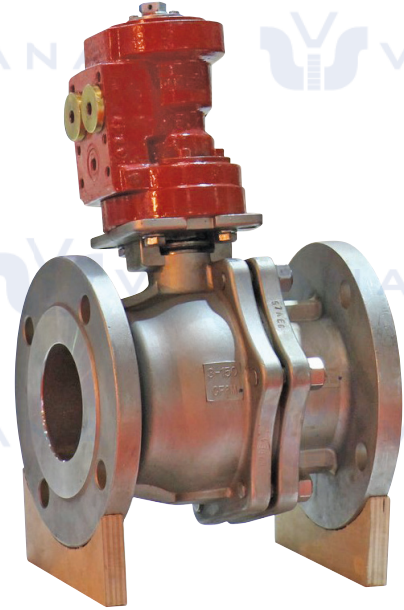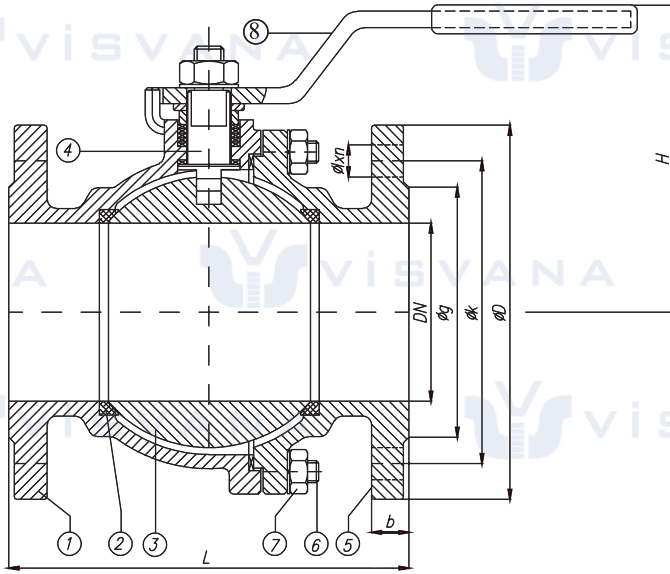

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	Paslanmaz Döküm AISI 316 Cast Stainless Steel AISI 316
2	Body Seat	Gövde Burcu	Teflon / PTFE
3	Ball	Küre	Paslanmaz Döküm AISI 316 - Cast Stainless Steel AISI 316
4	Stem	Mil	Paslanmaz Çelik - Stainless Steel ASTM A182 Gr. F316
5	Bonnet	Kapak	Paslanmaz Döküm AISI 316 - Cast Stainless Steel AISI 316
6	Stud	Saplama	Paslanmaz Çelik - Stainless Steel ASTM A182 Gr. F316
7	Nut	Somun	Paslanmaz Çelik - Stainless Steel ASTM A182 Gr. F316
8	Lever	Kol	Sfero Döküm veya Çelik - Ductile Iron and Steel

6
Ball Valves

Valve Dimensions / Boyut Ölçüleri DIN 3357			PN 16					Weight / Ağırlık
DN	L	H	Flange Dimensions / Flanş Ölçüleri DIN EN 1092					Kg.
			ØD	Øk	Øg	b	ØLxn	
32	130	110	140	100	78	18	Ø18x4	8
40	140	160	150	110	88	18		11
50	150	160	165	125	102	18		16
65	170	170	185	145	122	18		25
80	180	210	200	160	138	20	Ø18x8	35
100	190	240	220	180	158	20		50
125	200	280	250	210	188	22	Ø22x8	74
150	210	330	285	240	212	22		110
200	230	400	340	295	268	24	Ø37x12	155