

Design / Dizayn: JIS F7305 STOP
JIS F7353 SDNR



Pressure Rate / Basınç Aralığı: 5 K

Size Range / Ölçü Aralığı: DN50-DN400

Flange Ends / Flanş: JIS B2239 - 5 K

Inspection / Teftiş: JIS F7400

Application : Aboard ships for hot and cold
Water, Oil and Steam.

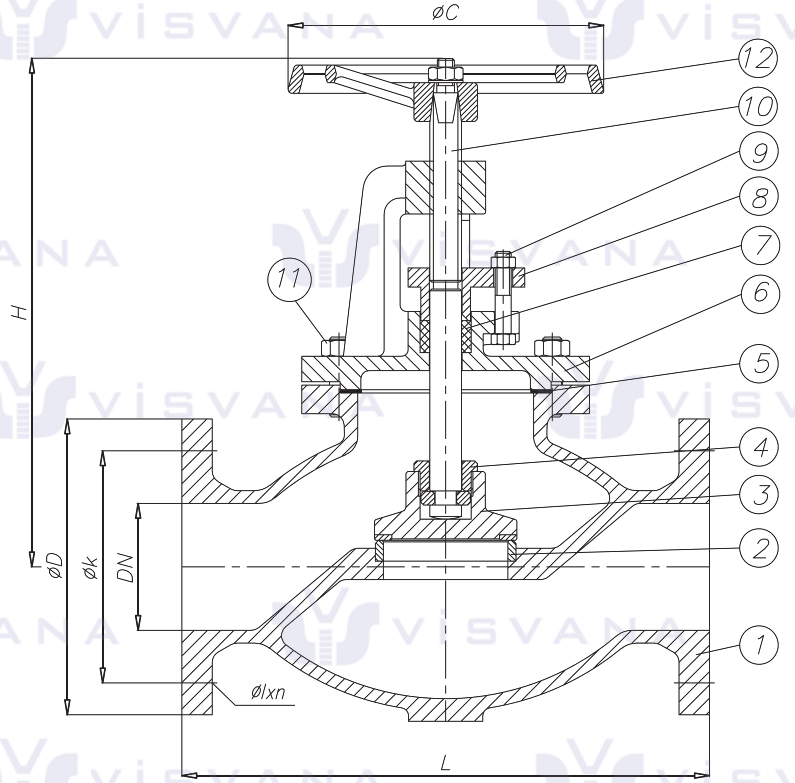

Screw Down Non Return
(SDNR)

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG 40 / GS-C25	8	Gland	Baskı	GG 25 / GGG 40 / GS-C25
2	Seat	Burç	Bronze Rg5 / 13Cr / SS 304	9	Bolt/Nut	Cıvata/Somun	Galvanized Steel
3	Disc	Klapa	GG 25 / GGG 40 / GS-C25	10	Stem	Mil	CuZn35Ni / 13Cr / SS 304
4	Disc Nut	Baskı	Brass / 13Cr	11	Stud/Nut	Cıvata/Somun	Galvanized Steel
5	Gasket	Conta	Klingerite	12	Handwheel	Volan	GG 25
6	Bonnet	Kapak	GG 25 / GGG 40 / GS-C25				
7	Packing	Salmastra	Graphite				

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
50	210	260	160	130	105	Ø15x4	12.4	750201	751101
65	250	300	180	155	130	Ø15x4	18.2	750202	751102
80	280	315	200	180	145	Ø19x4	24.1	750203	751103
100	340	340	220	200	165	Ø19x8	31.1	750204	751104
125	410	400	250	235	200	Ø19x8	47.5	750205	751105
150	480	460	300	265	230	Ø19x8		750206	751106

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
200	570	550	400	320	280	Ø23x8		750207	751107
250	740	680	400	385	345	Ø23x12		750208	751108
300	840	770	500	430	390	Ø23x12		750209	751109
350	940	840	500	480	435	Ø25x12		750210	751110
400	1050	940	630	540	495	Ø25x16		750211	751111