

ANGLE TYPE SDNR GLOBE VALVE KÖŞE TİP KUMANDALI ÇEK VALF

Design / Dizayn : DIN 3356

Center to Face / L Boyu : EN 558 Serie 8,



DIN 3202 F32

Pressure / Basınç : PN 10 -16 - 25 - 40

Size Range / Ölçü Aralığı : DN15 - DN600

Flange Ends / Flanş : EN 1092-2/B

Tests / Testler : EN 12266

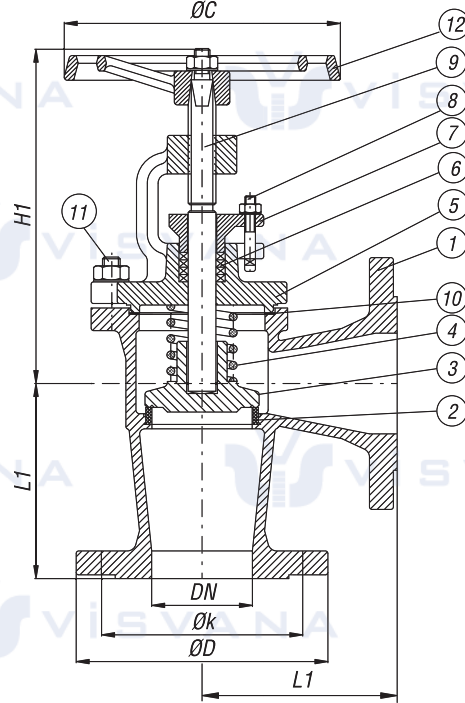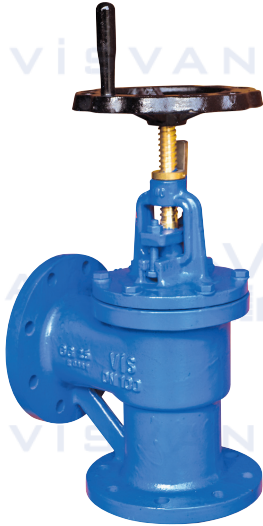

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GG640 / GG640,3/GSC25/Bronze/ RG5/RG7/CuSn10/304/316/Dublex	7	Gland	Sal. Baskısı	GG 25 / GG640 / GG640,3/GSC25/Bronze/ RG5/RG7/CuSn10/304/316/Dublex
2	Seat Ring	Burç	304 / 316 / 13Cr / Bronze / RG5	8	T Stud, Nut	T Saplama, Somun	5.6/8
3	Disc	Klape	304 / 316 / 13Cr / Bronze / RG5	9	Stem	Mil	1.4021/Cu Sn8
4	Spring	Yay	1.4301	10	Gasket	Conta	Klingerite/Asberit
5	Bonnet	Kapak	GG 25 / GG640 / GG640,3/GSC25/Bronze/ RG5/RG7/CuSn10/304/316/Dublex	11	Stud, Nut	Saplama, Somun	5.6/8
6	Packing	Salmastra	Graphite	12	Handwheel	El Çarkı	GG 25

* Totally stainless steel or bronze disc are optional. * Komple paslanmaz veya bronz disk opsiyoneldir.

					PN16			PN40		
DN	L1	H1	Strok	ØC	ØD	Øk	Ağırlık kg	ØD	Øk	Ağırlık kg
							Açılı Angle			Açılı Angle
15	90	155	7	120	95	65	4	95	65	4
20	95	155	7	120	105	75	4	105	75	5
25	100	170	9	140	115	85	5	115	85	6
32	105	175	11	140	140	100	7	140	100	8
40	115	195	15	160	150	110	11	150	110	13
50	125	205	18	160	165	125	13	165	125	15
65	145	225	23	180	185	145	19	185	145	23
80	155	250	28	200	200	160	24	200	160	27
100	175	305	35	225	220	180	33	235	190	39
125	200	315	43	250	250	210	48	270	220	58
150	225	380	50	300	285	240	62	300	250	75
200	275	425	68	400	340	295	128	375	320	155
250	325	470	80	520	405	355	135	450	385	162
300	375	675	100	520	460	410	270	515	450	320

Not: DN600'a kadar üretimimiz vardır.
Note: We have production till DN600.